


DS-2CC102/112/192P(N)-IR5 Color IR Camera



- Compact design
- 1/3" Sony CCD
- Minimum Illumination: 0.1Lux/F1.2 (0 Lux with IR)
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Internal synchronization
- Weather Proof: IP66 standard

Unit: mm

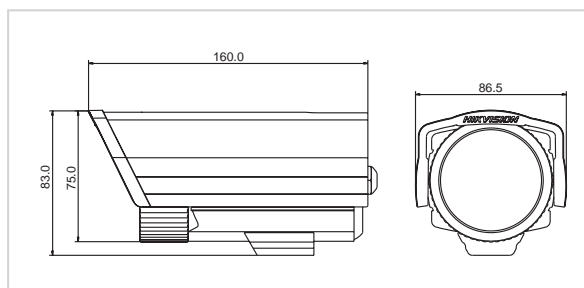

Specifications

		DS-2CC102P(N)-IR5	DS-2CC112P(N)-IR5	DS-2CC192P(N)-IR5
Camera	Image Sensor	1/3 inch SONY Super HAD CCD		
	Effective Pixels	PAL: 500 (H) × 582 (V) NTSC: 510 (H) × 492 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)
	Horizontal Resolution	420TVL	480TVL	540TVL
	Signal System	PAL / NTSC		
	Min. Illumination	0.1Lux @ F1.2 (0 LUX with IR)		
	Electronic Shutter	1/50 (1/60)s to 1/100,000s		
	Synchronization	Internal Synchronization		
	Video Output	1Vp-p Composite Output (75Ω / BNC)		
	S/N Ratio	More than 48 dB		
Lens	BLC	ON		
	Lens	16mm (3.6mm, 6mm, 8mm, 12mm option)		
General	IR Distance	Approx 50 to 60 meters		
	Water and Dust Resistance	IP66		
	Power Supply	12VDC, ±10%		
	Power Consumption	8W MAX		
	Working Temperature	-10°C ~ 60°C		
	Dimensions(mm)	86.5 × 83 × 160 (3.43" × 3.29" × 6.34")		
Weight	1000g (2.2lbs)			

Available Models

DS-2CC102P-IR5, DS-2CC102N-IR5, DS-2CC112P-IR5, DS-2CC112N-IR5, DS-2CC192P-IR5, DS-2CC192N-IR5