



## DS-2CD7153-E 2M CMOS Mini Vandal-proof Network Indoor Dome Camera

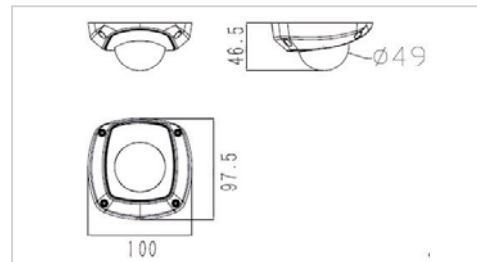

- Maximum Resolution up to 2 mega, 15 fps @ 1600×1200, real time video at Full HD 720P
- Adopt advanced video compression with high compression ratio
- Progressive scan CMOS, capture motion video without sawtooth
- Support ePTZ function
- Support PoE power supply

Unit: mm

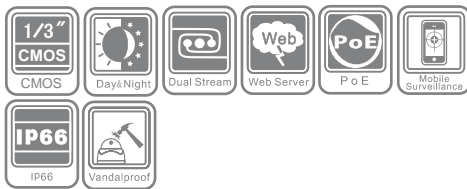

### Specifications

		DS-2CD7153-E
Camera	Image Sensor	1/3 inch CMOS
	Effective Pixels	1600 (H) × 1200 (V)
	Min. Illumination	Color: 0.5 Lux @ F1.2; B/W: 0.1Lux @ F1.2
	Electronic Shutter	1/25s ~1/100,000s
	Day&Night	Electronic
	Lens	4mm, F1.2 Fixed Iris(2.8, 6, 8mm optional)
	Angle of view	90°
Compression Standard	Video Compression	H.264/Mpeg4/Mjpeg
	Video Bit Rate	32 Kbps~16Mbps
	Audio Compression	OggVorbis
Image	Max. Image Resolution	1600×1200
	Frame Rate	15fps (1600 x 1200), 30fps (1280 x 720)
Functions	e-PTZ	Yes
	Storage	Support NAS, iSCSI
	Intelligent Alarm	Motion Detection, Video Tampering, Video Loss, Network Broken, IP address conflict, Storage exception
	Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTCP, PPPoE, FTP, SMTP, NTP, SNMP, HTTPS, SIP, 802.1x, IPV6
	Basic	Initial Set button, Anti-flicker, Dual Stream, Heartbeat, Password Protection, watermark
Interface	3-Axis adjustment	Yes
	Audio	Internal Microphone optional
	Communication Interface	1 RJ45 10M / 100M self-adaptive Ethernet port
General	Power Supply	DC12V±10% / PoE
	Power Consumption	3W MAX
	Working Temperature	-10°C ~ 60°C
	Working Humidity	90% or less
	Impact Protection	IEC60068-2-75Eh,50J;EN50102, exceeding IK10
	Weather Proof	IP66
	Dimensions(mm)	100×97.5×46.5
Weight	250g	

### Available Models

DS-2CD7153-E