



DS-9000HFI-S H.264 / Linux Embedded Recorder

Overview

The Series DS-9000HFI-S is the next generation of hybrid digital video recording technology from Hikvision. The DS-9000HFI-S Hybrid supports both analog and IP-based cameras while being used as a standalone DVR, hybrid DVR or as an NVR. Built on a user friendly embedded platform, making it free of viruses and adware, it combines the latest in advanced H.264 video encoding and decoding technologies. The DS-9000HFI-S Hybrid delivers rock-solid reliability and high performance.


Model

DS-9008HFI-S - 8 Channel
DS-9016HFI-S - 16 Channel

Standard Features

- ▶ H.264 video compression
- ▶ 8 or 16 channel analog video input + 8ch IP
- ▶ Each channel supports dual stream
- ▶ Independent video encoding parameters
- ▶ Up to 8 SATA HDD at 2TB each
- ▶ S.M.A.R.T. technology
- ▶ HDD standby function
- ▶ VGA monitor and composite video output
- ▶ Supports DDNS
- ▶ E-mail alert configuration
- ▶ Easy USB backup
- ▶ Remote viewing through IE browser or client software
- ▶ Pentaplex operations enables simultaneous recording, live view, playback, back-up and network operations

Rear I/O Panel Diagram

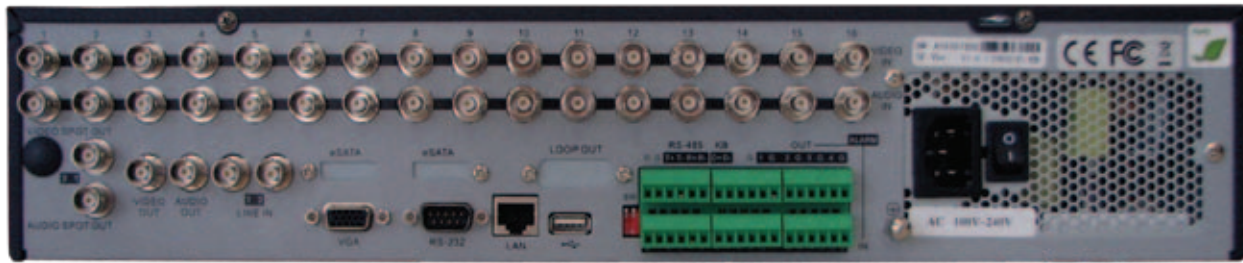

Advanced Features

- ▶ NEW user friendly, icon driven GUI software
- ▶ Advanced motion detection, privacy mask, tampering and video loss alerts
- ▶ Pre/Post-recording of alarm and motion detected events
- ▶ Full system logging including operation, alarm and exception
- ▶ Video & audio synchronized compression
- ▶ HDD S.M.A.R.T. technology
- ▶ Digital zoom in live view and playback
- ▶ PTZ preset, pattern and patrol control
- ▶ Supports NTP (Network Time Protocol) and SADP (Search Activated Device Protocol)
- ▶ Supports front panel, mouse, IR remote, and keyboard
- ▶ Video file lock option
- ▶ Upload of alarm events to remote management host
- ▶ High resolution VGA display
- ▶ 1 audio input for each video input
- ▶ Supports Blackberry, iPhone, and Windows Mobile 5.0+

Specifications

Video & Audio Input

Video Compression	H.264
Video Input	8 or 16 BNC (1.0 Vp-p, 75 Ω) 8Ch: 8 Analog + 8Ch IP/4Ch @ 720P 16Ch: 16 Analog + 8Ch IP/4Ch @ 720P
Audio Compression	OggVorbis
Audio Input	8 or 16 Ch, BNC (2.0 Vp-p, 1 kΩ)
Voice Talk Input	2 Ch, BNC (2.0 Vp-p, 1 kΩ)

Video & Audio Output

Display	704x480
VGA Output	Up to 1280x1024 (60 Hz)
Recording Resolution	720P/4CIF/DCIF/2CIF/CIF/QCIF
Video Output	BNC (1.0 Vp-p, 75 Ω)
Recording/Playback	Up to 30fps per channel
Video Bitrate	32 kbps-3072 kbps
Audio Output	BNC (Linear Electric Level, 600 Ω)
Audio Bitrate	16 kbps

External Interface

Network Interface	1x RJ45 10M/100M/1000M Ethernet
Serial Interface	1x RS-232, 1x RS-485 (PTZ), 1x RS-485 (Keyboard Interface)
USB Interface	3x USB 2.0
Alarm Input	Up to 16 (terminal block)
Alarm Output	4 (terminal block)

Dimensions & Electrical

Power Supply	100-240V, 60 Hz
Consumption	<50W (w/o HDD)
Temperature	14° - 131° F
Humidity	10% - 90%
Chassis	19" standard 2U
Size	17 ¾" (L) x 17 ¾" (W) x 3 ¾" (H)
Weight	17.5 lbs