




DS-2CC502/592N-IR IR Dome Camera

- Compact design
- 1/3" SONY CCD
- Minimum Illumination: 0.1Lux/F1.2 (0 LUX with IR)
- Day/night auto switch
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Weather Proof: IP66 standard

Outdoor



Unit: mm

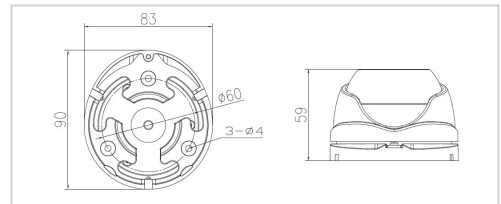

Specifications

		DS-2CC502N-IR	DS-2CC592N-IR
Camera	Image Sensor	1/3" SONY CCD	
	Signal System	NTSC	
	Effective Pixels	NTSC: 510 (H) × 492 (V)	
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.2 Lux @ (F1.8, AGC ON), 0 Lux with IR	
	Shutter Time	NTSC: 1/60 s to 1/100,000 s	
	Lens	3.6 mm Angle of view: 78°	
	Lens Mount	M12	
	Angle Adjustment	Pan: 0 - 355°; Tilt: 0 - 75°;	
	Day & Night	Electronic	
	Horizontal Resolution	420 TVL	540 TVL
	Synchronization	Internal synchronization	
	Video Output	1 Vp-p composite output (75 Ω/BNC)	
	S/N Ratio	More than 48 dB	
BLC	On		
General	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)	
	Power Supply	12 DC ± 10%	
	Power Consumption	Max. 3 W	
	Weather Proof Rating	IP66	
	IR Range	Approx 10 to 20 meters	
	Dimension (Dia.xH)	89.6 × 59.1 mm (3.53" × 2.33")	
	Weight	400 g (0.88 lbs)	