




## DS-2CC532N Dome Camera

- Compact design
- 1/4" CMOS
- Day/night with auto switch
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Internal synchronization

Indoor

Unit: mm

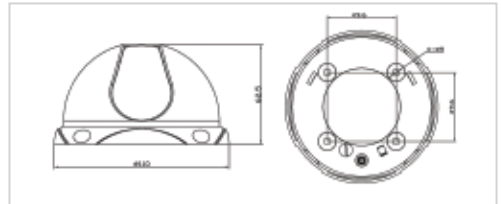

### Specifications

		DS-2CC532N
Camera	Image Sensor	1/4" CMOS
	Signal System	NTSC
	Effective Pixels	640 (H) × 480 (V)
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON) 0.28 Lux @ (F2.0, AGC ON)
	Shutter Time	1/25 (30) s to 1/15,000 s
	Lens	3.6 mm @ F2.0 Angle of view: 78°
	Lens Mount	M12
	Angle Adjustment	Pan: 0 - 120°; Tilt: 0 - 90°
	Day & Night	Electronic
	Horizontal Resolution	480 TVL
	Synchronization	Internal Synchronization
	Video Output	1 Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 48 dB	
BLC	On	
General	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
	Power Supply	12 V DC ± 10%
	Power Consumption	Max. 2 W
	Dimension (Dia.xH)	Φ 110 × 62.5 mm (Φ 4.33" × 2.46")
	Weight	330 g (0.73 lbs)