

DS-2CD7153-E 2MP Mini Dome Network Camera




- Maximum Resolution up to 2 megapixel
15 fps(60Hz) @ 1600×1200, real time video at Full HD 720P
- H.264 Video Compression with high compression ratio
- Progressive scan CMOS, capture motion video without sawtooth
- PoE
- Conforms to ONVIF and PSIA

Outdoor



Unit: mm

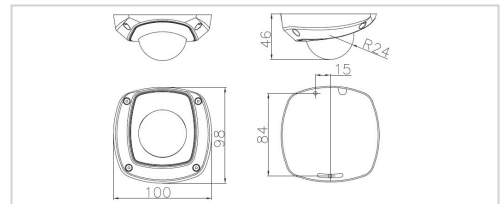

Specifications

		DS-2CD7153-E
Camera	Image Sensor	1/3" Progressive Scan CMOS
	Min. Illumination	0.5 Lux @ (F1.2, AGC ON), 0.1 Lux @ (F1.2, AGC ON, sensitivity × 5) 1.1 Lux @ (F1.8, AGC ON), 0.2 Lux @ (F1.8, AGC ON, sensitivity × 5)
	Shutter Time	1/25 s to 1/100,000 s
	Lens	4 mm @ F1.8 Angle of view: 71°(4 mm)
	Lens Mount	M12
	Angle Adjustment	Pan: ± 15°, Tilt: 0 - 90°, Rotation: ± 15°
	Day & Night	Electronic
Compression Standard	Video Compression	H.264/MJPEG
	Bit Rate	32 Kbps - 16 Mbps
	Dual Stream	Yes
Image	Max. Image Resolution	1600 x 1200
	Frame Rate	60 Hz: 15 fps (1600 × 1200), 30 fps (1280 × 720)
	Image Setting	Saturation, Brightness, Contrast adjustable through client software or web browser
Interface	Alarm Trigger	Motion detection
	Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP
	Security	Password protection, Watermark
	System Compatibility	ONVIF, PSIA, CGI
	Communication Interface	1 RJ45 10 M/100 M Ethernet port
	Reset Button	Yes
	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
General	Power Supply	12 V DC ± 10% PoE (802.3af)
	Power Consumption	Max. 4 W
	Impact Protection	IEC60068-275Eh, 50J; EN50102, up to IK10
	Weather Proof Rating	IP66
	Dimension (WxHxD)	99.9 × 97.5 × 46.5 mm (3.93" × 3.84" × 1.83")
Weight	250 g (0.55 lbs)	

Accessories



DS-1234ZJ
Single Gang Box Adapter

Compatible accessories are available for additional purchase.