


DS-4002/4004MDI PCI Matrix Decode Card



DS-4002MDI

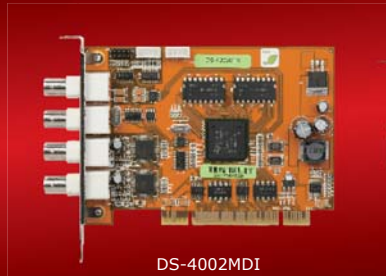

DS-4004MDI

Key Features

- 4-ch CIF/2CIF real time decoding, or 2-ch 4CIF real time decoding, or 1-ch 4CIF with 3-ch CIF real time decoding
- 2-ch audio and video outputs
- Up to 16 multiplex windows
- Video output resolution up to 4CIF+2xQCIF

Specifications

		DS-4002MDI	DS-4004MDI
Video/Audio output	Video output	2-ch	4-ch
	Video output interface	BNC (1.0Vp-p, 75Ω)	
	Decoding resolution	4CIF/DCIF/2CIF/CIF/QCIF	
	Audio output	2-ch	4-ch
	Audio output interface	BNC, Linear output, 600Ω	
	Audio decoding	4-ch	8-ch
	Dual Stream	Yes	
General	Power consumption	< 3.5W	< 7.5W
	Working temperature	-10°C~+50°C	
	Working humidity	10%~90%	
	Dimension	133mmx96mm	158mmx108mm
System requirements	OS	Windows 2000/XP/Server 2003/Vista, Redhat 9.0, Fedora 3, Fedora 4, Fedora 5	
	CPU	Intel series	
	Motherboard	Based on Intel 845/865/915/925/945/965/G31/G33/P31/P35/P43/P45 Series. Please refer to the compatible list on the Hikvision website	
	Memory	256MB or above	
	Display Adapter	NVIDIA GeForce Mx400/440/4000 or above series FX 5200/5600 GeForce 6600 or above series ATI Radeon 7000/7500/8500/9000/9200/9550/9600 or above series ATI X300/X550/X700/X1300/X1600 or above series Intel 845G/865G/915G integrated Graphics Controller	